



Visit Us on the Web at www.chatillon.com

STS Series Torque Sensors for DFS-R-ND Series

Specification Sheet
SS-FM-3025-0305
March 2005

The CHATILLON® STS Series torque sensors are full-bridge strain gauge sensors complete with 15-pin plug. These sensors are used exclusively with the Chatillon DFS-R-ND Series digital indicator. The sensor's torque values and sensitivity factors are stored in memory within the sensor plug. When connected to a DFS-R-ND indicator, the capacity and calibration points are automatically recognized by the instrument. The instrument then becomes a full-featured torque measurement instrument. The STS Series torque sensor meets ASTM E4 and BS EN ISO 7500 part 1 for a $\pm 0.3\%$ accuracy sensor. The sensors are connected to the DFS-R-ND with a retractable cord that extends fully to nearly 9 ft. (3 m).

Remote Sensors- Torque Measurement

Model	in-oz	N-cm	in-lb	kg-cm	N-m
STS-0003	50 x 0.005	35 x 0.005	3 x 0.0005	3.5 x 0.0005	0.35 x 0.0001
STS-0012	192 x 0.02	125 x 0.02	12 x 0.002	12.5 x 0.002	1.25 x 0.0002
STS-0050	800 x 0.1	500 x 0.05	50 x 0.005	50 x 0.005	5 x 0.0005
STS-0100	-	1000 x 0.1	100 x 0.01	100 x 0.01	10 x 0.001
STS-0200	-	2000 x 0.2	200 x 0.02	200 x 0.02	20 x 0.002



DFS-R shown with STS Series torque sensor.

Specifications

- Input Resistance:** 1100 ohms ± 100
- Output Resistance:** 1000 ohms ± 100
- Rated Output:** 2.0 mV/V
- Safe Overload:** 150% Full Scale
- Non-Linearity:** $\pm 0.1\%$ Full Scale
- Hysteresis:** $\pm 0.1\%$ Full Scale
- Zero Balance:** $\pm 1.0\%$ Full Scale
- Operating Temp:** 30° to 120°F (-40° to 82°C)




You Get More with Your CHATILLON Gauge.



A registered trademark of AMETEK Inc.

Dimensions - STS Torque Sensor

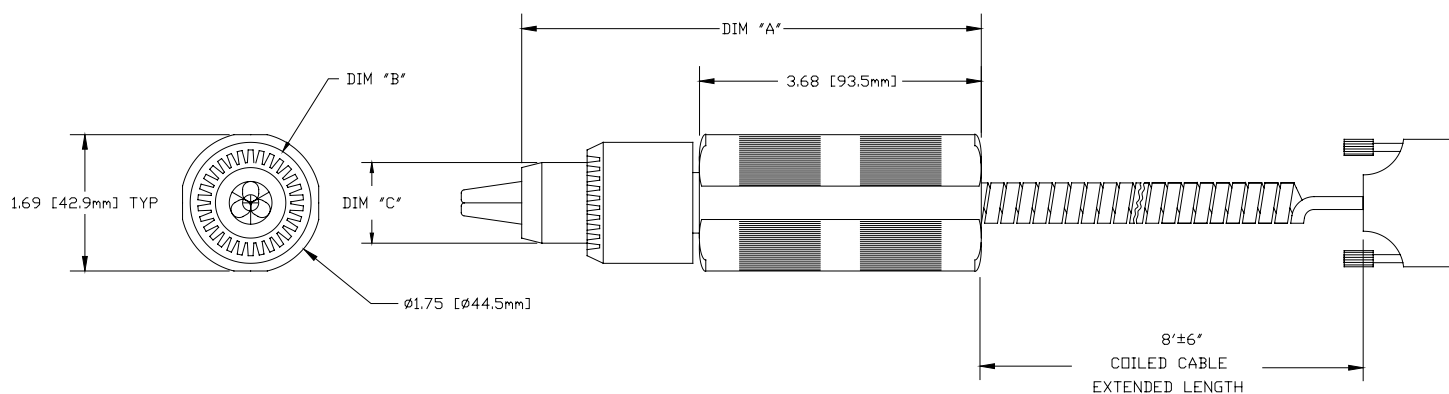

200 IN-LB	6.00 [152.4mm]	Ø1.62 [Ø41.1mm]	Ø1.20 [Ø30.5mm]	5/64 TO 1/2	NO
100 IN-LB	6.00 [152.4mm]	Ø1.62 [Ø41.1mm]	Ø1.20 [Ø30.5mm]	5/64 TO 1/2	NO
50 IN-LB	6.00 [152.4mm]	Ø1.62 [Ø41.1mm]	Ø1.20 [Ø30.5mm]	5/64 TO 1/2	NO
12 IN-LB	6.00 [152.4mm]	Ø1.62 [Ø41.1mm]	Ø1.20 [Ø30.5mm]	5/64 TO 1/2	YES
50 OZ-IN	5.62 [142.7mm]	Ø1.25 [Ø31.8mm]	Ø1.00 [Ø25.4mm]	1/16 TO 3/8	YES
CAPACITY	DIM "A"	DIM "B"	DIM "C"	SAMPLE SIZE	OVERLOAD STOP

E96-356

AMETEK
TEST AND CALIBRATION INSTRUMENTS

For the authorized Chatillon Distributor or Manufacturer's Representative near you, go to www.chatillon.com

Americas

AMETEK TCI Division
8600 Somerset Drive
Largo, Florida 33773
United States of America
Tel +1-727-536-7831
Tel +1-800-527-9999
Fax +1-727-539-6882
Email chatillon.fl-lar@ametek.com

France

AMETEK Lloyd Instruments SAS
3 avenue des Coudriers
Zone d'Activite de l'Observatoire
78180 Montigny-Le-Bretonneux
France
Tel +33-1-3057-4774
Fax +33-1-3057-5033
Email general@lloyd-instruments.com

Germany

AMETEK GmbH
Rudolf-Diesel-Strasse 16
D-40670 Meerbusch
Germany
Tel +49-0-2159-9136-70
Fax +49-0-2159-9136-80
Email apie@ametek.dr

Singapore

AMETEK Singapore Pvt. Ltd.
10 Ang Mo Kio Street 65
#05-12 Techpoint
Singapore 569059
Tel +65-484-2388
Fax +65-481-6588
Email aspl@ametek.com.sg

United Kingdom

AMETEK Lloyd Instruments Ltd.
Forum House, 12 Barnes Wallis Rd
Segensworth East
Fareham
Hampshire PO15 5TT
United Kingdom
Tel +44-0-1489-574221
Fax +44-0-1489-885118
Email uk-far.general@ametek.co.uk

Visit Us on the Worldwide Web at:
www.chatillon.com

© 2005 by AMETEK, Inc.

Information within this document is subject to change without notice.

ISO 9001/2000
ISO/IEC17025
Manufacturer